Digital colour multifunction printers

IM C2010(A)
IM C2510
IM C3010(A)
IM C3510(A)
IM C4510(A)
IM C4510(A)
IM C5510A
IM C6010

✓ Printer ✓ Copier ✓ Scanner ✓ Fax





Let's make your print infrastructure a gateway to your digital workspace

As workstyles evolve, digitalisation, agility and teamwork are essential for your organisation to remain competitive. Ricoh's Managed Print & Automation Services unlock the value of your print infrastructure with tailored, managed solutions which empower your people, improve efficiency, reduce cost, enhance security and drive sustainability. Our market-leading IM C Series is innovatively designed. Devices seamlessly integrate with cloud-based services and offer high-quality print, scanning and workflow automation.





Achieve your sustainability goals

With environmental impact at the top of the global agenda, a sustainable approach to organisational operations is essential. Whether reducing resource and energy consumption to save costs or demonstrating a responsible approach to procuring products and services, the right print infrastructure and partner can support your sustainability goals.

A carbon neutral future

At Ricoh, we are firmly committed to reducing our environmental impact and driving a sustainable approach. The IM C Series significantly reduces energy consumption, as well as paper consumption by digitising workflows through scanning; helping to reduce your carbon footprint and costs.

More energy savings

The IM C Series boasts industry-leading low Typical Energy Consumption (TEC) values and automatic eco-mode energy saving (0.3W) when in sleep mode. They use an innovative new toner that fuses at a lower temperature, resulting in the ideal intelligent device with sustainability at its core.

More recycled plastic

Designed for sustainability across its lifecycle, the IM C Series is made using 50% post-consumer recycled plastic while PET toner bottles are produced from 100% recycled plastic. Plastic packaging is reduced by 54% thanks to a more sustainable material and no excess packaging.

Secure and efficient

In an increasingly digital world, organisations must protect sensitive data while enabling flexible workstyles. Our printers are designed and manufactured with end-to-end security protection and includes the latest security features – RICOH Always Current Technology and Multi-Factor Authentication. Secure cloud infrastructure ensures safe access – anywhere and any device.

Ongoing security

RICOH's Always Current Technology provides access to security upgrades and automatically downloads updates. New security tools include WPA3 authentication for wireless encryption and the latest hardware security module. You can also restrict networks by port name and protocol as well as IP address.



More security – Multi-Factor Authentication

Multi-Factor Authentication, including new card-based access to our printing devices, to minimise the risk of data breaches.



Improved admin management system

The IM C Series offers privileged admin account control with unlimited Multi-Function Printer administrator accounts and customisable permissions. This eliminates risks related to sharing IDs and can be linked to user ID systems including Microsoft Windows and LDAP platforms.





Enhanced productivity and seamless employee experience

Ricoh's intelligent devices enable the ultimate employee experience with features that save time and increase efficiency. The IM C Series automates workflows that accelerate processes and encourage collaboration. An optimised print infrastructure empowers employees to transition to digital ways of working easily and securely; improving their workplace experience.

Third-generation Smart Operation Panel

Our user-friendly IM C Smart Operation Panel has been upgraded for an even more intuitive and enjoyable experience. Brightness, touch sensitivity and position detection have been improved for optimal access to the device's many resources and functions.



Improved user experience

- Android OS 10 for better security and usability
- · Faster CPU, high RAM memory and enhanced performance
- Enhanced accessibility to device, tiltable for better visibility & new capacitive touch sensor
- · Fast wake up time from sleep mode



Efficiencies in paper handling

New peripherals ensure professional results with automated finishing possibilities. The single pass double-sided document feeder capably handles high volumes, special paper and card types. High-end options include a hybrid and booklet finisher for that extra touch.



Supporting your entire digital journey now and into the future

We understand the digital transformation that organisations are undertaking. We are here to set your organisation up for success and equip your people with the right tools to stay ahead. Our Managed Print & Automation Services can adapt to your changing needs, offering customisation, flexibility and reliability.

Scanning and automation

Scanning and automation just got easier and quicker. Scanning creates digitised documents that can automate processes like invoice and contract management. Uploading documents into your systems for archiving, knowledge sharing or as part of a workflow is now simpler with Ricoh's software.



Document management storage

Our scalable document management applications drive significant cost savings alongside process improvements. By taking print to the cloud, you can set location-aware printers and enable users to print anytime, anywhere.



Transitioning to the cloud

Our cloud software solutions are readily available and easy to integrate with your existing IT infrastructure, allowing you to enhance the capabilities of your print device. You can also securely connect mobile devices to carry out tasks from your phone or tablet.



The choice is yours

Simple to use with sophisticated and professional results, Ricoh's IM C Series is the perfect tool for your digital workspace. Our trusted quality and technical expertise are evident from every angle.

IM C2010/IM C2010A/IM C2510

- 20 to 25 ppm A3 all-in-one printer for all-round support
- Scan speed 150ipm (simplex)/300ipm(duplex) in SPDF
- · Fast warm-up time of 24 seconds
- TEC value (kWh/week): 0.20 (20ppm)/0.25 (25ppm)
- B/W power consumption (operation): 411.8 W (20ppm)/449.2 W (25ppm), Sleep mode: 0.3 W

IM C3010/IM C3010A/IM C3510/IM C3510A


- 30 to 35 ppm A3 all-in-one printer for high productivity
- Scan speed 150ipm (simplex)/300ipm(duplex) in SPDF
- · Fast warm-up time of 24 seconds
- TEC value (kWh/week): 0.30 (30ppm)/0.35 (35ppm)
- B/W power consumption (operation): 464.4 W (30ppm)/500.5 W (35ppm), Sleep mode: 0.3 W

IM C4510/IM C4510A/IM C5510A/IM C6010

- · Productive 45 to 60 ppm A3 all-in-one printer for top performance
- · Scan speed 150ipm (simplex)/300ipm(duplex) in SPDF
- · Super fast warm-up time of 23 seconds
- TEC value (kWh/week): 0.45 (45ppm)/0.62 (55ppm)/0.67 (60ppm)
- B/W power consumption (operation): 576.6 W (45ppm)/726 W (55ppm)/763.3 W (60ppm), Sleep mode: 0.32 W



Hardware configuration

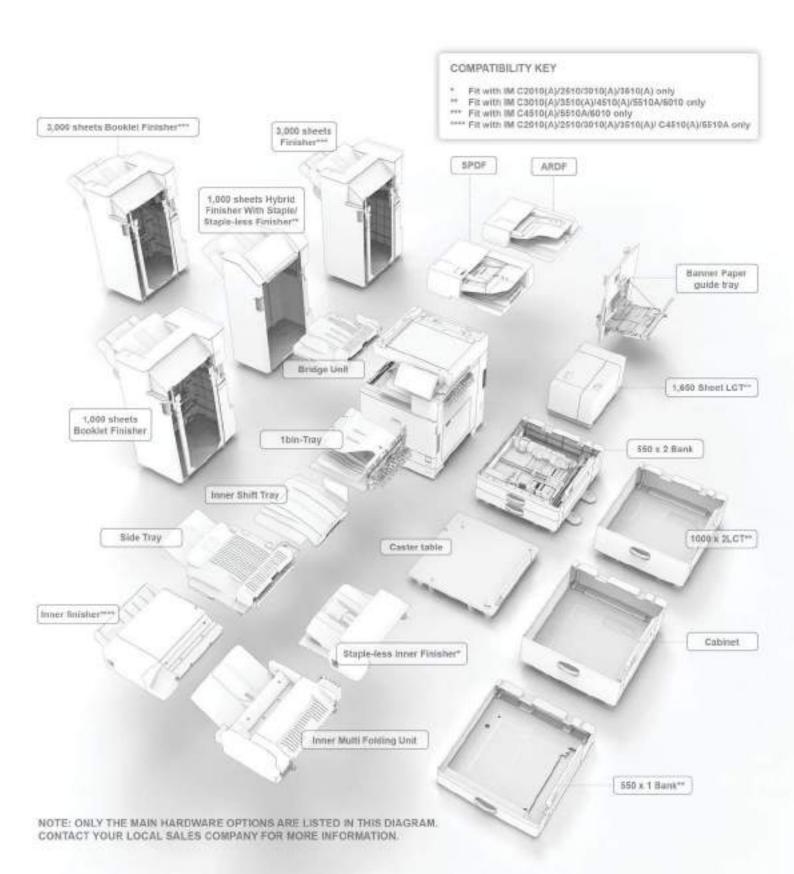

IM C2010(A) / IM C2510 / IM C3010(A) / IM C3510(A) / IM C4510(A) / IM C5510A / IM C6010

	IM C2010(A)	IM C2510	IM C3010(A)	IM C3510(A)	IM C4510(A)	IM C5510A	IM C6010		
GENERAL									
Varm-up time	24 seconds	24 seconds	24 seconds	24 seconds	23 seconds	23 seconds	23 seconds		
First copy speed: B/W	5.1 seconds	5.1 seconds	4.5 seconds	4.5 seconds	3.6 seconds	2.9 seconds	2.9 seconds		
irst copy speed: b/// irst copy speed: full colour	7.4 seconds	7.4 seconds	6.9 seconds	6.9 seconds	5.4 seconds	4.2 seconds	4.2 seconds		
ontinuous output speed	20 ppm	25 ppm	30 ppm	35 ppm	45 ppm	55 ppm	60 ppm		
				8 GB			8 GB		
emory: standard	6 GB 6 GB	6 GB 6 GB	8 GB 8 GB	8 GB	8 GB 8 GB	8 GB 8 GB	8 GB		
lemory: maximum SD: standard	0 00	0 00	0 00	256 GB	0 00	0 GB	0 00		
SD: optional				1 TB					
DD: optional				320 GB					
RDF capacity	100 sheets	100 sheets	100 sheets	100 sheets	100 sheets	-	-		
PDF capacity	220 sheets	-	220 sheets	220 sheets	220 sheets	220 sheets	220 sheets		
/eight ARDF model (kg)	89.7	89.7	92.9	92.9	94.4	-	-		
/eight SPDF model (kg)	96.1	-	99.3	99.3	100.8	100.8	100.8		
imensions ARDF model:				587 x 701 x 913 mm					
/xDxH									
imensions SPDF model:				587 x 701 x 963 mm					
/xDxH				001 X 101 X 000 111111					
ower source			:	220 - 240 V, 50 - 60 H	Z				
OPIER									
fultiple copying				Up to 999 copies					
Resolution				600 dpi					
			F	·					
Coom			Fron	n 25% to 400% in 1% :	steps				
PRINTER									
irst print speed: B/W	4.5 seconds	4.5 seconds	4 seconds	4 seconds	3.2 seconds	2.5 seconds	2.4 seconds		
irst print speed: full colour	7 seconds	7 seconds	6.6 seconds	6.6 seconds	5.2 seconds	3.8 seconds	3.8 seconds		
PU (IM C2010(A), IM C2510,			Ar	oolloLake E3930 1.3 G	Hz				
M C3010(A), IM C3510(A))				oolloLake E3940 1.6 G					
Printer language: standard				Script 3 (emulation), Pl					
		Com			` ,	aha@			
rinter language: option	Genuine Adobe® PostScript®3™, XPS, PictBridge, PDF Direct from Adobe®								
rint resolution: maximum			4,8	300 x 1,200 dpi equival	ent				
letwork interface: standard		Ethernet 10 base-	T/100 base-TX/1000 b	ase-T, USB Host I/F T	ype A, USB Device I/F	Type B, Bluetooth			
letwork interface: option			Wireless LAN (IEEE	802.11 a/b/g/n/ac), Ad	ditional NIC (2nd port)				
Mobile printing capability			Apple AirPrint, M	lopria®, Ricoh Smart [Device Connector				
Vindows® environments	Mindouro® 0.1 Mir	dayon 10 Mindaya	® 11, Windows® Serv			no® Convor 2010 Min	dayon Caryar 20		
	vviildows@ o. i, vviil	dows® 10, willdows				75® Server 2019, Will	idows@ Server 20		
Mac OS environments				intosh OS X v10.15 or					
	UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX								
JINIA environments		SAP® R/3®, SAP® S/4®							
SAP® environments									
UNIX environments SAP® environments Other supported environments				AP® R/3®, SAP® S/4					
SAP® environments Other supported environments SCANNER				SAP® R/3®, SAP® S/4 IBM iSeries					
SAP® environments Other supported environments SCANNER Scanning speed: ARDF (A4 LEF,				AP® R/3®, SAP® S/4					
SAP® environments Dther supported environments SCANNER Scanning speed: ARDF (A4 LEF, 3/W full colour) Scanning speed: SPDF (A4 LEF, 44 LEF, 45 LEF, 46 LEF,			S	SAP® R/3®, SAP® S/4 IBM iSeries	8				
SAP® environments Other supported environments GCANNER Scanning speed: ARDF (A4 LEF, SW full colour) Scanning speed: SPDF (A4 LEF, 100dpi, B/W full colour)			S	AP8 R/38, SAP8 S/4 IBM iSeries 80 ipm (200/300 dpi)	8				
SAP® environments Other supported environments SCANNER Scanning speed: ARDF (A4 LEF, B/W full colour)		Single page JPEG, S	S 150 ip ingle page PDF, Single	AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress	® duplex) ion PDF, Single page				
SAP® environments Other supported environments SCANNER Scanning speed: ARDF (A4 LEF, SW full colour) Scanning speed: SPDF (A4 LEF, 200dpi, BW full colour) Resolution: maximum		Single page JPEG, S	S 150 ip	AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress	® duplex) ion PDF, Single page				
AP® environments Other supported environments GCANNER		Single page JPEG, S	S 150 ip ingle page PDF, Single	AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI	® duplex) ion PDF, Single page				
SAP® environments Other supported environments CANNER Canning speed: ARDF (A4 LEF, SW full colour) Codopi, B/W full colour) Resolution: maximum Cile formats		Single page JPEG, S	S 150 ip ingle page PDF, Single	AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI	® duplex) ion PDF, Single page				
AP® environments Other supported environments CANNER Canning speed: ARDF (A4 LEF, W full colour) Ccanning speed: SPDF (A4 LEF, W full colour) Ccanning speed: SPDF (A4 LEF, W full colour) Cesolution: maximum Clesolution:		Single page JPEG, S n compression PDF, I	S 150 ip ingle page PDF, Singl Multi page PDF/A, Sing	AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI E-mail, Folder, USB	® luplex) ion PDF, Single page DF, Multi page Encrypt	ion PDF, Single/multi			
AP® environments ther supported environments CANNER canning speed: ARDF (A4 LEF, W full colour) canning speed: SPDF (A4 LEF, 000dpi, B/W full colour) tesolution: maximum tile formats can modes AX dircuit ransmission speed		Single page JPEG, S n compression PDF, I G3: approxime	S 150 ip ingle page PDF, Single	AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT #	fluplex) fon PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor	ion PDF, Single/multi			
AP® environments ther supported environments CANNER canning speed: ARDF (A4 LEF, W full colour) canning speed: SPDF (A4 LEF, DOdpi, B/W full colour) esolution: maximum ile formats can modes AX ircuit ransmission speed		Single page JPEG, S n compression PDF, I G3: approxime	150 ip ingle page PDF, Single Multi page PDF/A, Sing ately 3 seconds (200 x ately 3 seconds (200 x	8AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT # 33.6 Kbps	fuplex) fon PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor 1 chart TTI off, memor	ion PDF, Single/multi			
AP® environments ther supported environments CANNER canning speed: ARDF (A4 LEF, W full colour) canning speed: SPDF (A4 LEF, DOdpi, B/W full colour) esolution: maximum ile formats can modes AX ircuit ransmission speed		Single page JPEG, S n compression PDF, I G3: approxime	150 ip ingle page PDF, Single Multi page PDF/A, Sing ately 3 seconds (200 x ately 3 seconds (200 x	AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT #	fuplex) fon PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor 1 chart TTI off, memor	ion PDF, Single/multi			
AP® environments ther supported environments CANNER canning speed: ARDF (A4 LEF, W full colour) canning speed: SPDF (A4 LEF, 00dpi, B/W full colour) esolution: maximum ile formats can modes AX ircuit ransmission speed lodem speed: maximum esolution: standard		Single page JPEG, S n compression PDF, I G3: approxime	150 ip ingle page PDF, Single Multi page PDF/A, Sing ately 3 seconds (200 x ately 3 seconds (200 x	8AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT # 33.6 Kbps	Buplex) ion PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor 1 chart TTI off, memor 1 dpi	ion PDF, Single/multi			
AP® environments Other supported environments ACANNER CCANNER CC		Single page JPEG, S n compression PDF, I G3: approxime	150 ip ingle page PDF, Single Multi page PDF/A, Sing ately 3 seconds (200 x ately 3 seconds (200 x	8AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT # 33.6 Kbps 8.85 line/mm, 200x100	Buplex) ion PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor 1 chart TTI off, memor 1 dpi	ion PDF, Single/multi			
AP® environments ther supported environments CANNER canning speed: ARDF (A4 LEF, W full colour) canning speed: SPDF (A4 LEF, 20dpi, B/W full colour) esolution: maximum ille formats can modes AX ircuit ransmission speed lodem speed: maximum esolution: standard esolution: option ompression method		Single page JPEG, S n compression PDF, I G3: approxime	150 ip ingle page PDF, Single Multi page PDF/A, Sing ately 3 seconds (200 x ately 3 seconds (200 x	8AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption Pf E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT # 33.6 Kbps 8.85 line/mm, 200x100 15.4 line/mm, 400x400 MH, MR, MMR, JBIG	Buplex) ion PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor 1 chart TTI off, memor 1 dpi	ion PDF, Single/multi			
AP® environments ther supported environments CANNER canning speed: ARDF (A4 LEF, W full colour) canning speed: SPDF (A4 LEF, 00dpi, BW full colour) esolution: maximum ille formats can modes AX direcuit ransmission speed dodem speed: maximum esolution: standard esolution: option compression method canning speed (A4 LEF): ARDF		Single page JPEG, S n compression PDF, I G3: approxime	150 ip ingle page PDF, Single Multi page PDF/A, Sing ately 3 seconds (200 x ately 3 seconds (200 x	8AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption Pf E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT # 33.6 Kbps 8.85 line/mm, 200x100 15.4 line/mm, 400x400 MH, MR, MMR, JBIG 68 spm	Buplex) ion PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor 1 chart TTI off, memor 1 dpi	ion PDF, Single/multi			
AP® environments Other supported environments CANNER Canning speed: ARDF (A4 LEF, W full colour) coanning speed: SPDF (A4 LEF, Odopi, BW full colour) tesolution: maximum ile formats can modes AX Circuit transmission speed dodem speed: maximum tesolution: standard tesolution: option compression method coanning speed (A4 LEF): ARDF coanning speed (A4 LEF): SPDF		Single page JPEG, S n compression PDF, I G3: approxime	150 ip ingle page PDF, Single Multi page PDF/A, Sing ately 3 seconds (200 x ately 3 seconds (200 x	8AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption PI E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT # 33.6 Kbps 3.85 line/mm, 200x100 15.4 line/mm, 400x400 MH, MR, MMR, JBIG 68 spm 90 spm	Buplex) ion PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor 1 chart TTI off, memor 1 dpi	ion PDF, Single/multi			
SAP® environments Other supported environments CANNER Canning speed: ARDF (A4 LEF, SW full colour) Scanning speed: SPDF (A4 LEF, Ododpi, BW full colour) Resolution: maximum Cile formats Scan modes CAX		Single page JPEG, S n compression PDF, I G3: approxime	150 ip ingle page PDF, Single Multi page PDF/A, Sing ately 3 seconds (200 x ately 3 seconds (200 x	8AP® R/3®, SAP® S/4 IBM iSeries 80 ipm (200/300 dpi) m (simplex)/300 ipm (c 1,200 dpi e page High compress gle page Encryption Pf E-mail, Folder, USB PSTN, PBX 100 dpi, JBIG, ITUT # 100 dpi, MMR, ITUT # 33.6 Kbps 8.85 line/mm, 200x100 15.4 line/mm, 400x400 MH, MR, MMR, JBIG 68 spm	Buplex) ion PDF, Single page DF, Multi page Encrypt 1 chart TTI off, memor 1 chart TTI off, memor 1 dpi	ion PDF, Single/multi			

IM C2010(A) / IM C2510 / IM C3010(A) / IM C3510(A) / IM C4510(A) / IM C5510A / IM C6010

	IM C2010(A)	IM C2510	IM C3010(A)	IM C3510(A)	IM C4510(A)	IM C5510A	IM C6010	
PAPER HANDLING								
Recommended paper size	Standard paper tray(s): SRA3, A3, A4, A5, A6, B4, B5, B6, Envelopes Optional paper tray(s): SRA3, A3, A4, A5, A6, B4, B5, B6, Envelopes Bypass tray: SRA3, A3, A4, A5, A6, B4, B5, B6, Envelopes, Custom Size paper							
Paper input: standard				1,200 sheets				
Paper input: maximum	2,300 sheets	2,300 sheets	4,850 sheets					
Paper output: standard				500 sheets				
Paper output: max. (IM C4510(A), IM C5510A, IM C6010)				3,625 sheets				
Paper weight : Trays	60 - 300 g/m ²	60 - 300 g/m ²	60 - 300 g/m ²	60 - 300 g/m ²	60 - 300 g/m ²	60 - 300 g/m ²	60 - 300 g/m ²	
Paper weight : Bypass	52 - 300 g/m ²	52 - 300 g/m ²	52 - 300 g/m ²	52 - 300 g/m ²	52 - 300 g/m ²	52 - 300 g/m ²	52 - 300 g/m ²	
Paper weight : Duplex	52 - 169 g/m ²	52 - 169 g/m ²	52 - 256 g/m ²					
Paper types	Plain paper, Recycled paper, Special paper, Colour paper, Letterhead, Cardstock, Preprinted paper, Bond paper, Coated paper, Envelope, Gloss paper, Label paper							
ECOLOGY								
Power consumption: max.	< 1,700 W	< 1,700 W	< 1,700 W	< 1,700 W	< 1,850 W	< 1,850 W	< 1,850 W	
Power consumption operation: B&W	411.8 W	449.2 W	464.4 W	500.5 W	576.6 W	726 W	763.3 W	
Power consumption operation: Full colour	456.3 W	494.5 W	515.3 W	543.6 W	664.9 W	827.1 W	871.2 W	
Power consumption: ready	37.7 W	37.7 W	38.5 W	38.5 W	40.5 W	40.6 W	40.1 W	
Power consumption: sleep	0.3 W	0.3 W	0.3 W	0.3 W	0.32 W	0.32 W	0.32 W	
TEC*	0.2 kWh/week	0.25 kWh/week	0.3 kWh/week	0.35 kWh/week	0.45 kWh/week	0.62 kWh/week	0.67 kWh/week	
* It is a reference value based on the ENERGY STAR Ver.3.2 test method.								





















INPUT/OUTPUT TRAYS AND FINISHER OPTIONS

1x 550-sheet paper tray, 2x 550-sheet paper tray, 2,000-sheet Large capacity tray, 1,650-sheet side Large capacity tray, 1,000-sheet Hybrid finisher, 3,000-sheet finisher, 1,000-sheet Booklet finisher, 3,000-sheet booklet finisher, 250-sheet Internal finisher, 500-sheet Internal finisher, Stapleless internal finisher, Internal multi-fold unit, Internal shift tray, One-bin tray, Output jogger unit

OTHER OPTIONS

Fax unit, G3 Interface, Fax connection unit, Fax memory unit, Cabinet, Caster table, Side Tray, Banner paper guide tray, Punch units, IPDS unit, Camera direct print card, PostScript 3, IEEE 802.11 a/b/g/n/ac, Device server unit, File format converter, OCR unit, Page keeper, Imageable area extension unit, ADF handle, Counter I/F unit, NFC card reader, EFI controller, EFI Adobe Acrobat, EFI Color Profiler Suite, EFI Jobflow, EFI Fiery ColorRight, EFI Impose, EFI Compose, EFI Fiery Automation, EFI Hot folders, EFI JobExpert and PDF Processing Kit, Unicode Font Package for SAP, Card reader cover, SSD 1 TB option, Enhanced Security SSD, HDD Option, Bridge unit, XPS, SD card for fonts, Toner bottle lock, Stapleless unit, FAX stamp, Antimicrobial screen protector

CONSUMABLES

Toner (black)	30,000 prints	30,000 prints	40,000 prints	40,000 prints	42,000 prints	42,000 prints	42,000 prints
Toner (cyan/magenta/yellow)	18,000 prints	18,000 prints	28,000 prints				
Consumable yield based on 5%	2p/j	2p/j	3p∕j	3p∕j	4p∕j	4p∕j	4p/j
coverage/A4							

For availability of models, options and software, please consult your local supplier.

Ricoh Nederland B.V.

Hambakenwetering 1 5231 DD 's Hertogenbosch The Netherlands



(0)73 - 645 1333



